


Title X22-F-SK20		Item-Nr. A00007		
	Scale 2:1	Rev. A	Date 08.09.2021	Sheet 1

Technical Data - X22 - Automatic tool change

Power: 1,5 kW | 2,2 kW

Voltage: 230 V | 400 V

Number of poles: 2-poles | 4-poles

Cooling method: Liquid cooling

Tool interface: SK20

Rotational speed: 25.000 - 45.000 rpm

Spindle bearings: Steel bearings | Hybrid bearings

Temperature sensor: PTC | PT100 (bearings, coil end)

Rotational speed sensor: Incremental | Inductive

Motor plug: 9-pole straight | 9-pole angled

Sensor plug: 17-pole straight | 17-pole angled

Coolant connection: 8 mm straight | 8 mm angled

Pneumatic connection: 6 mm straight | 6 mm angled


Release pressure: 6 - 8 bar

Pneumatic piston return: 3 - 4 bar

Taper blow: 1 - 1,5 bar

Protection class: IP54

Weight: 5,7 kg

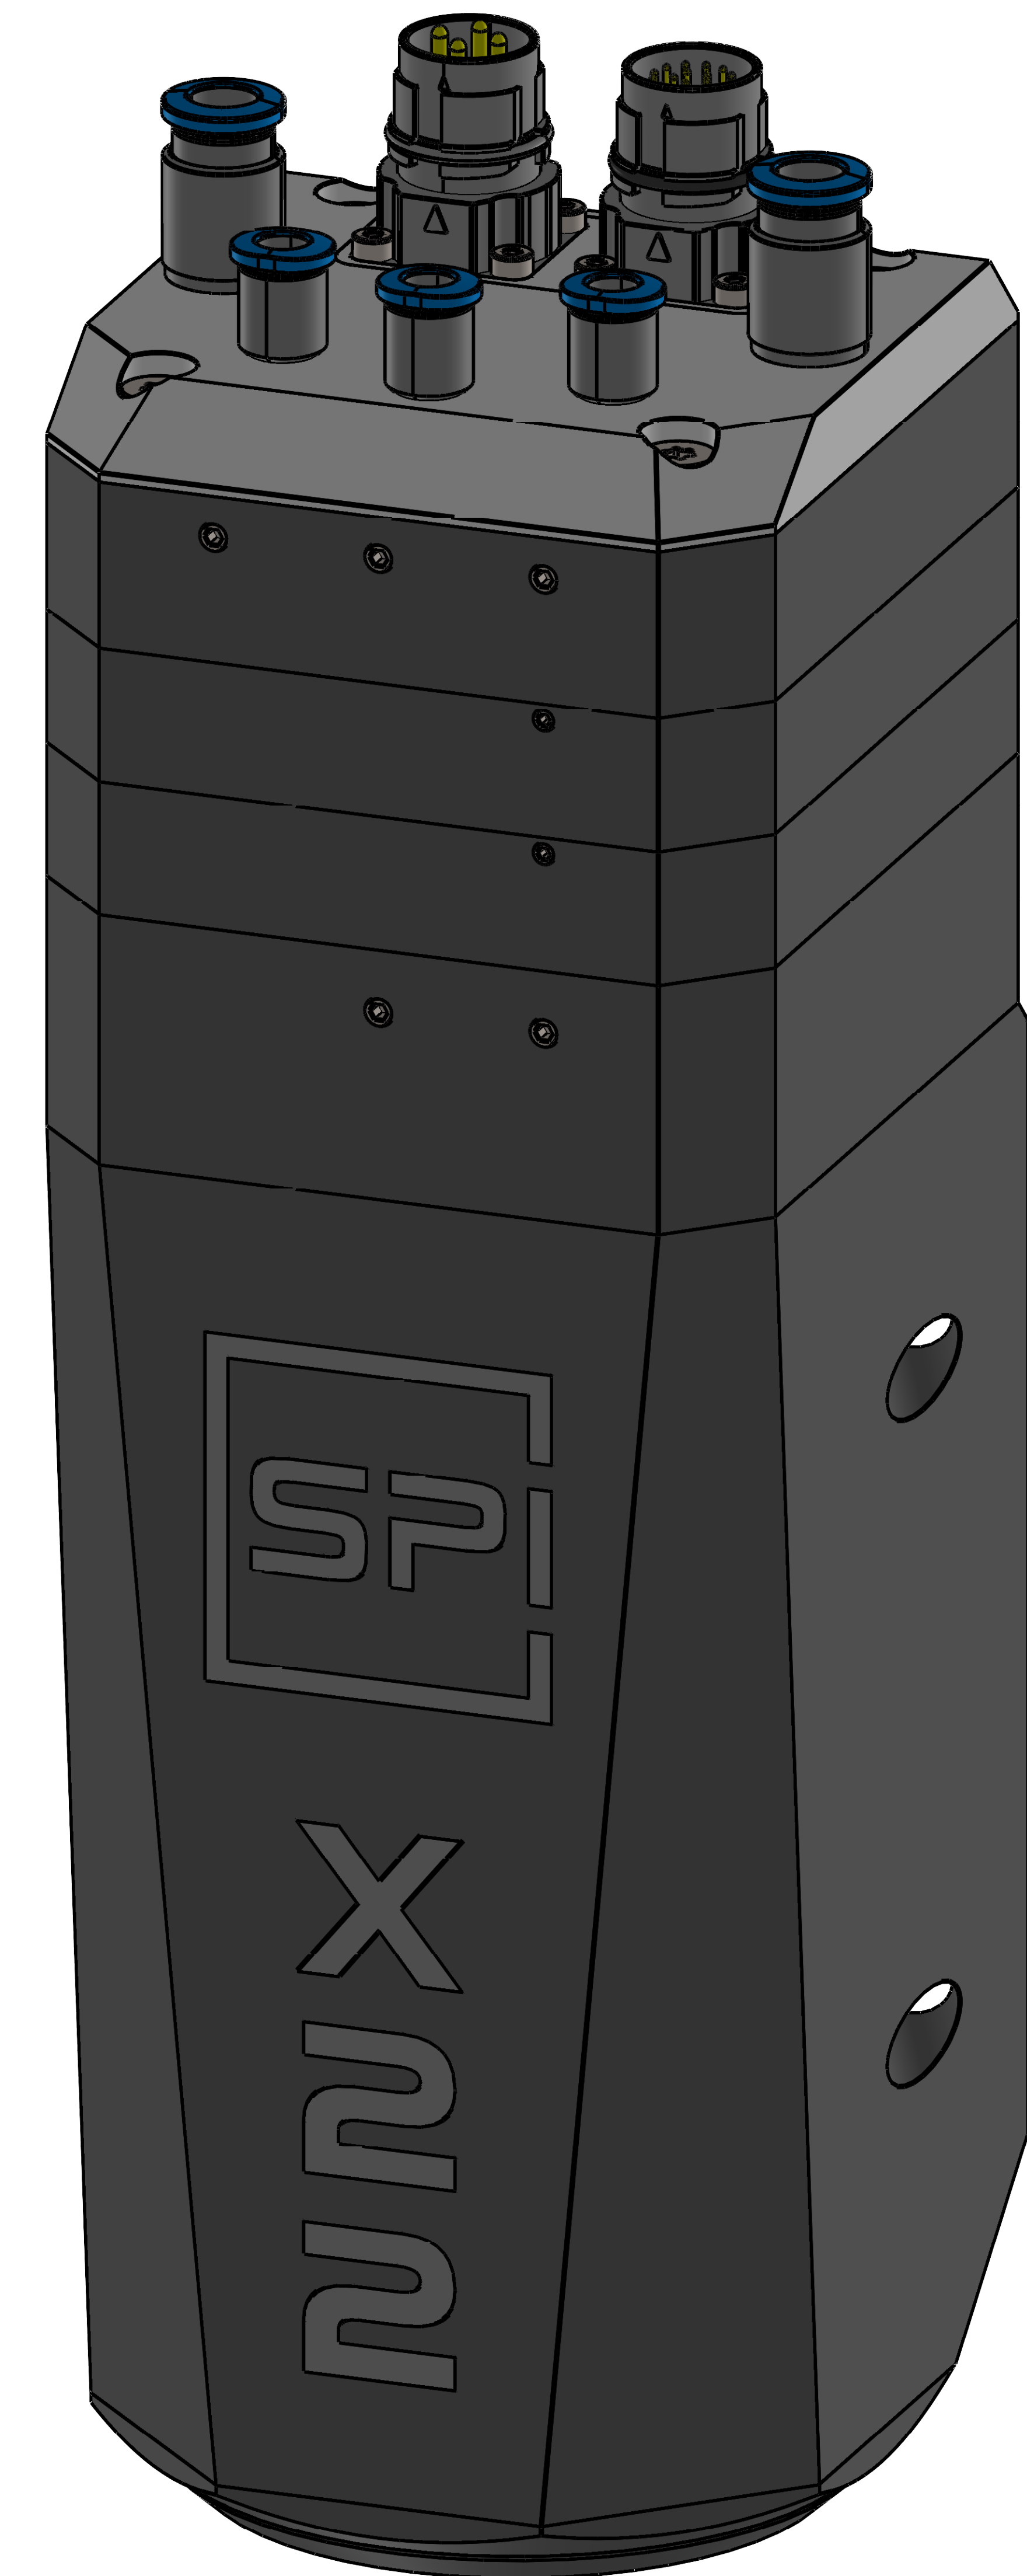

Title
X22-F-SK20

Item-Nr.
A00007



Scale	Rev.	Date	Sheet
2:1	A	08.09.2021	2