

© 2023 SPINOGY Technical changes, errors and printing mistakes are reserved.

Title X30-L-QTC-HSK32		Item-No. XP128		
Scale 2:1	Rev. A	Date 02.11.2023	Sheet 1	



# Technical Data - X30 - Semi-automatic tool change

Power: 3,0 kW | 4,0 kW | 5,0 kW

Voltage: 400 V

Number of poles: 2-pole | 4-pole

Cooling method: Air cooling

Tool interface: QTC-HSK-C32

Rotational speed: 20.000 - 35.000 rpm

Spindle bearings: Steel bearings | Hybrid bearings

Temperature sensor: PTC | PT100 (bearing, coil end)

Rotational speed sensor: Incremental | Inductive


Motor plug: 9-pole straight | 9-pole angled

Sensor plug: 17-pole straight | 17-pole angled


Fan: 24 V fan

Protection class: IP20 | IP50 (with filter)

Weight: 9,8 kg

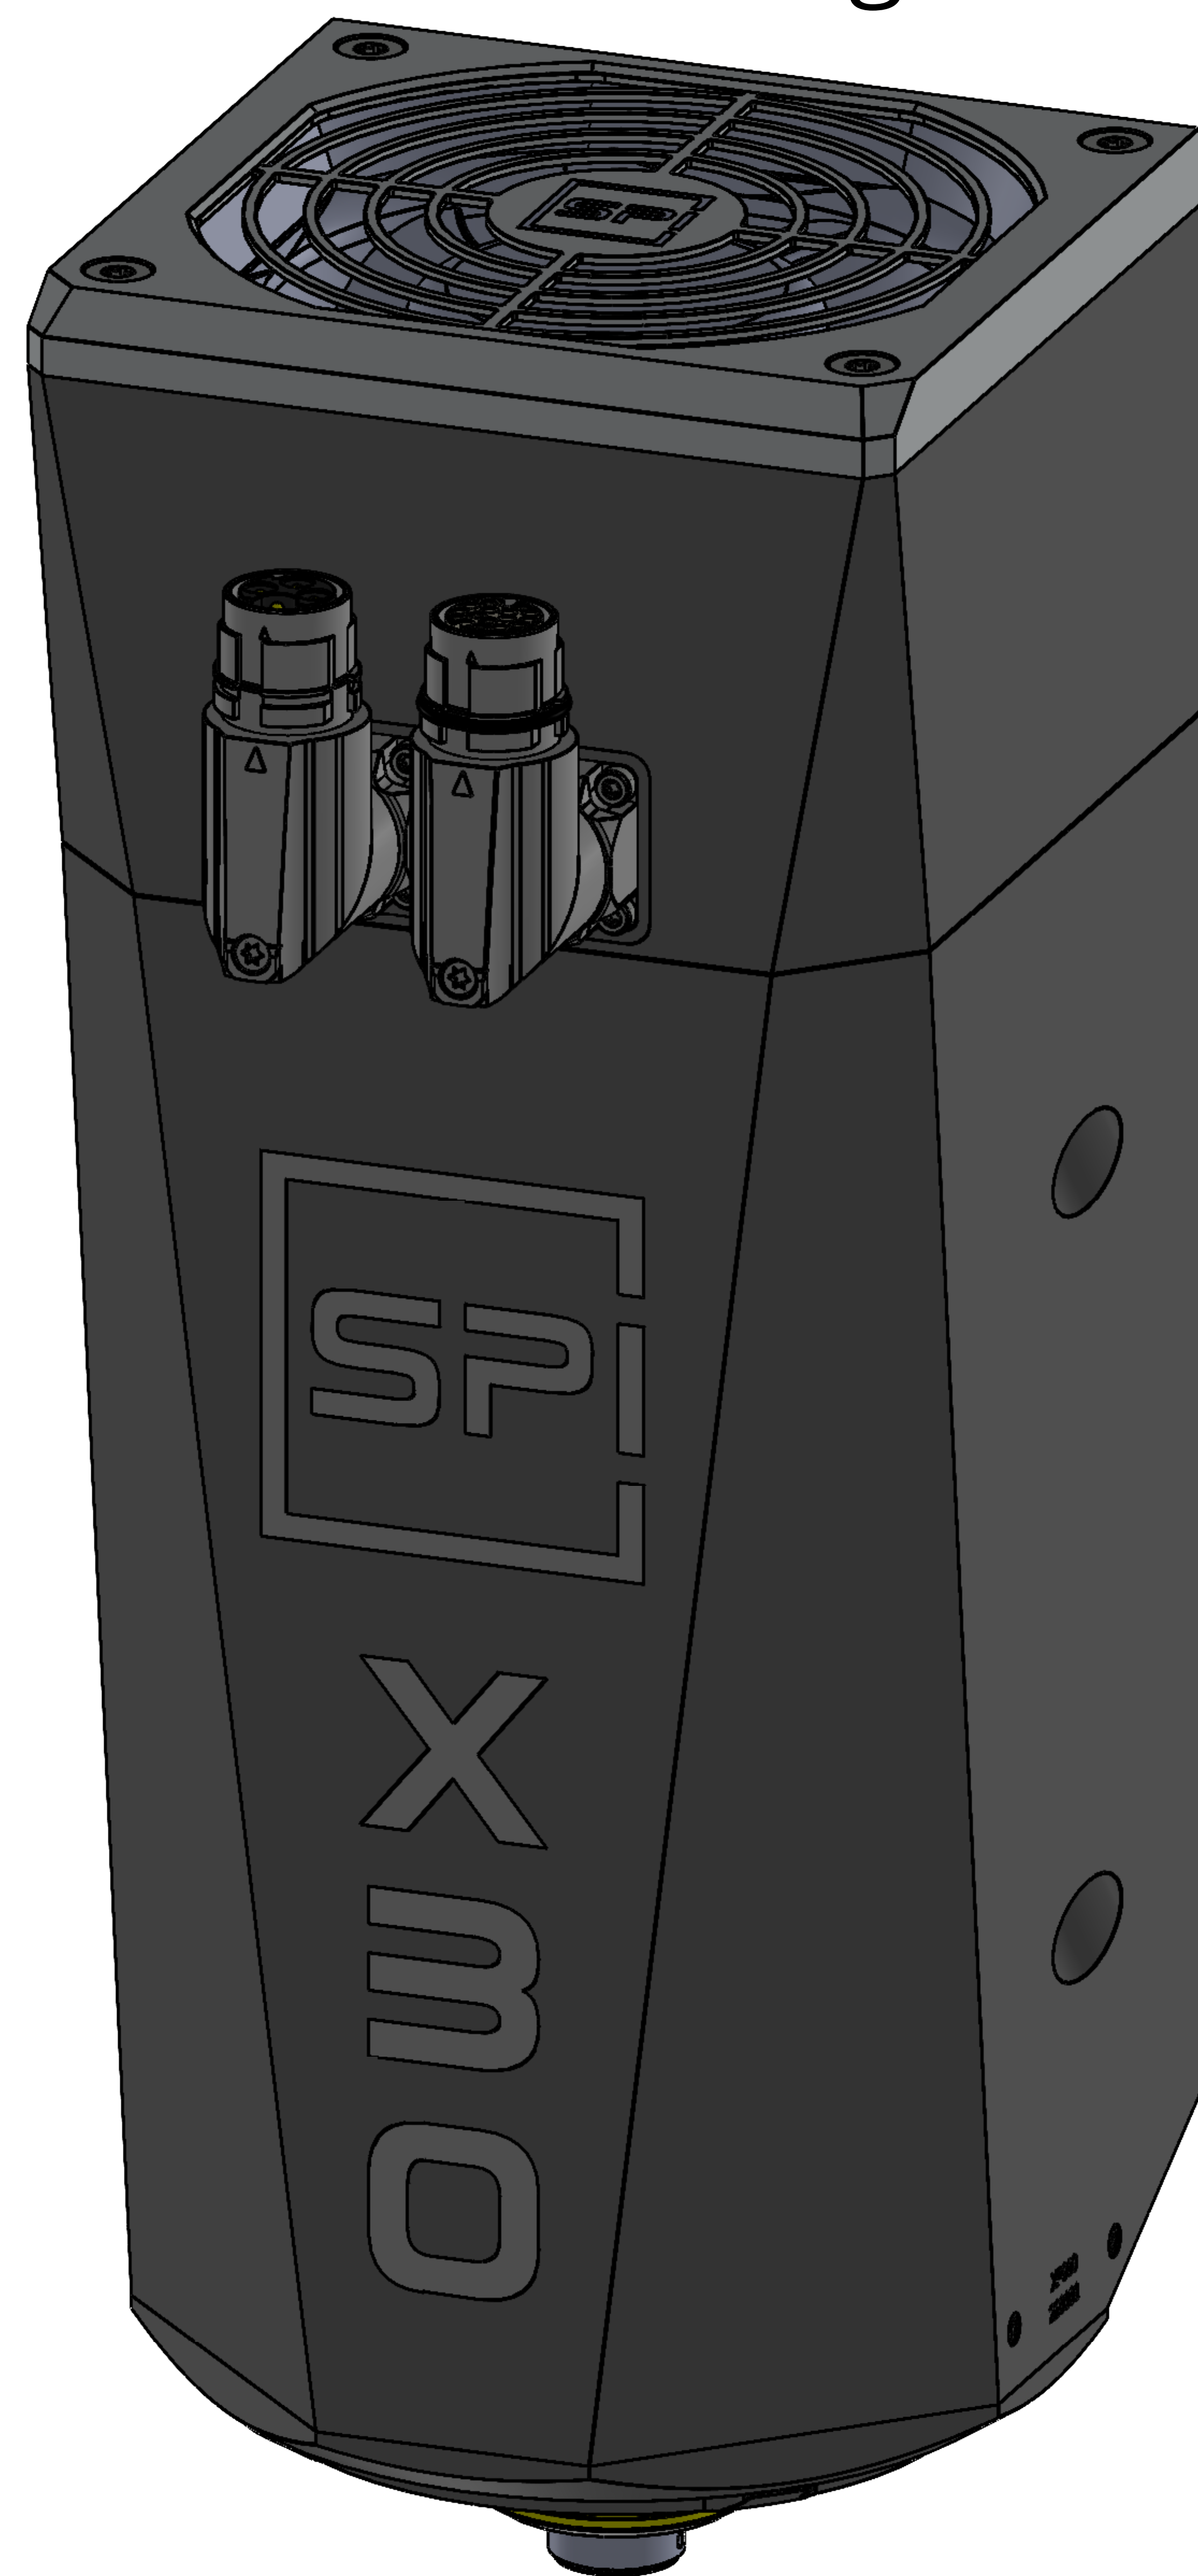

Full equipment  
(Sensor plug required from the second sensor on

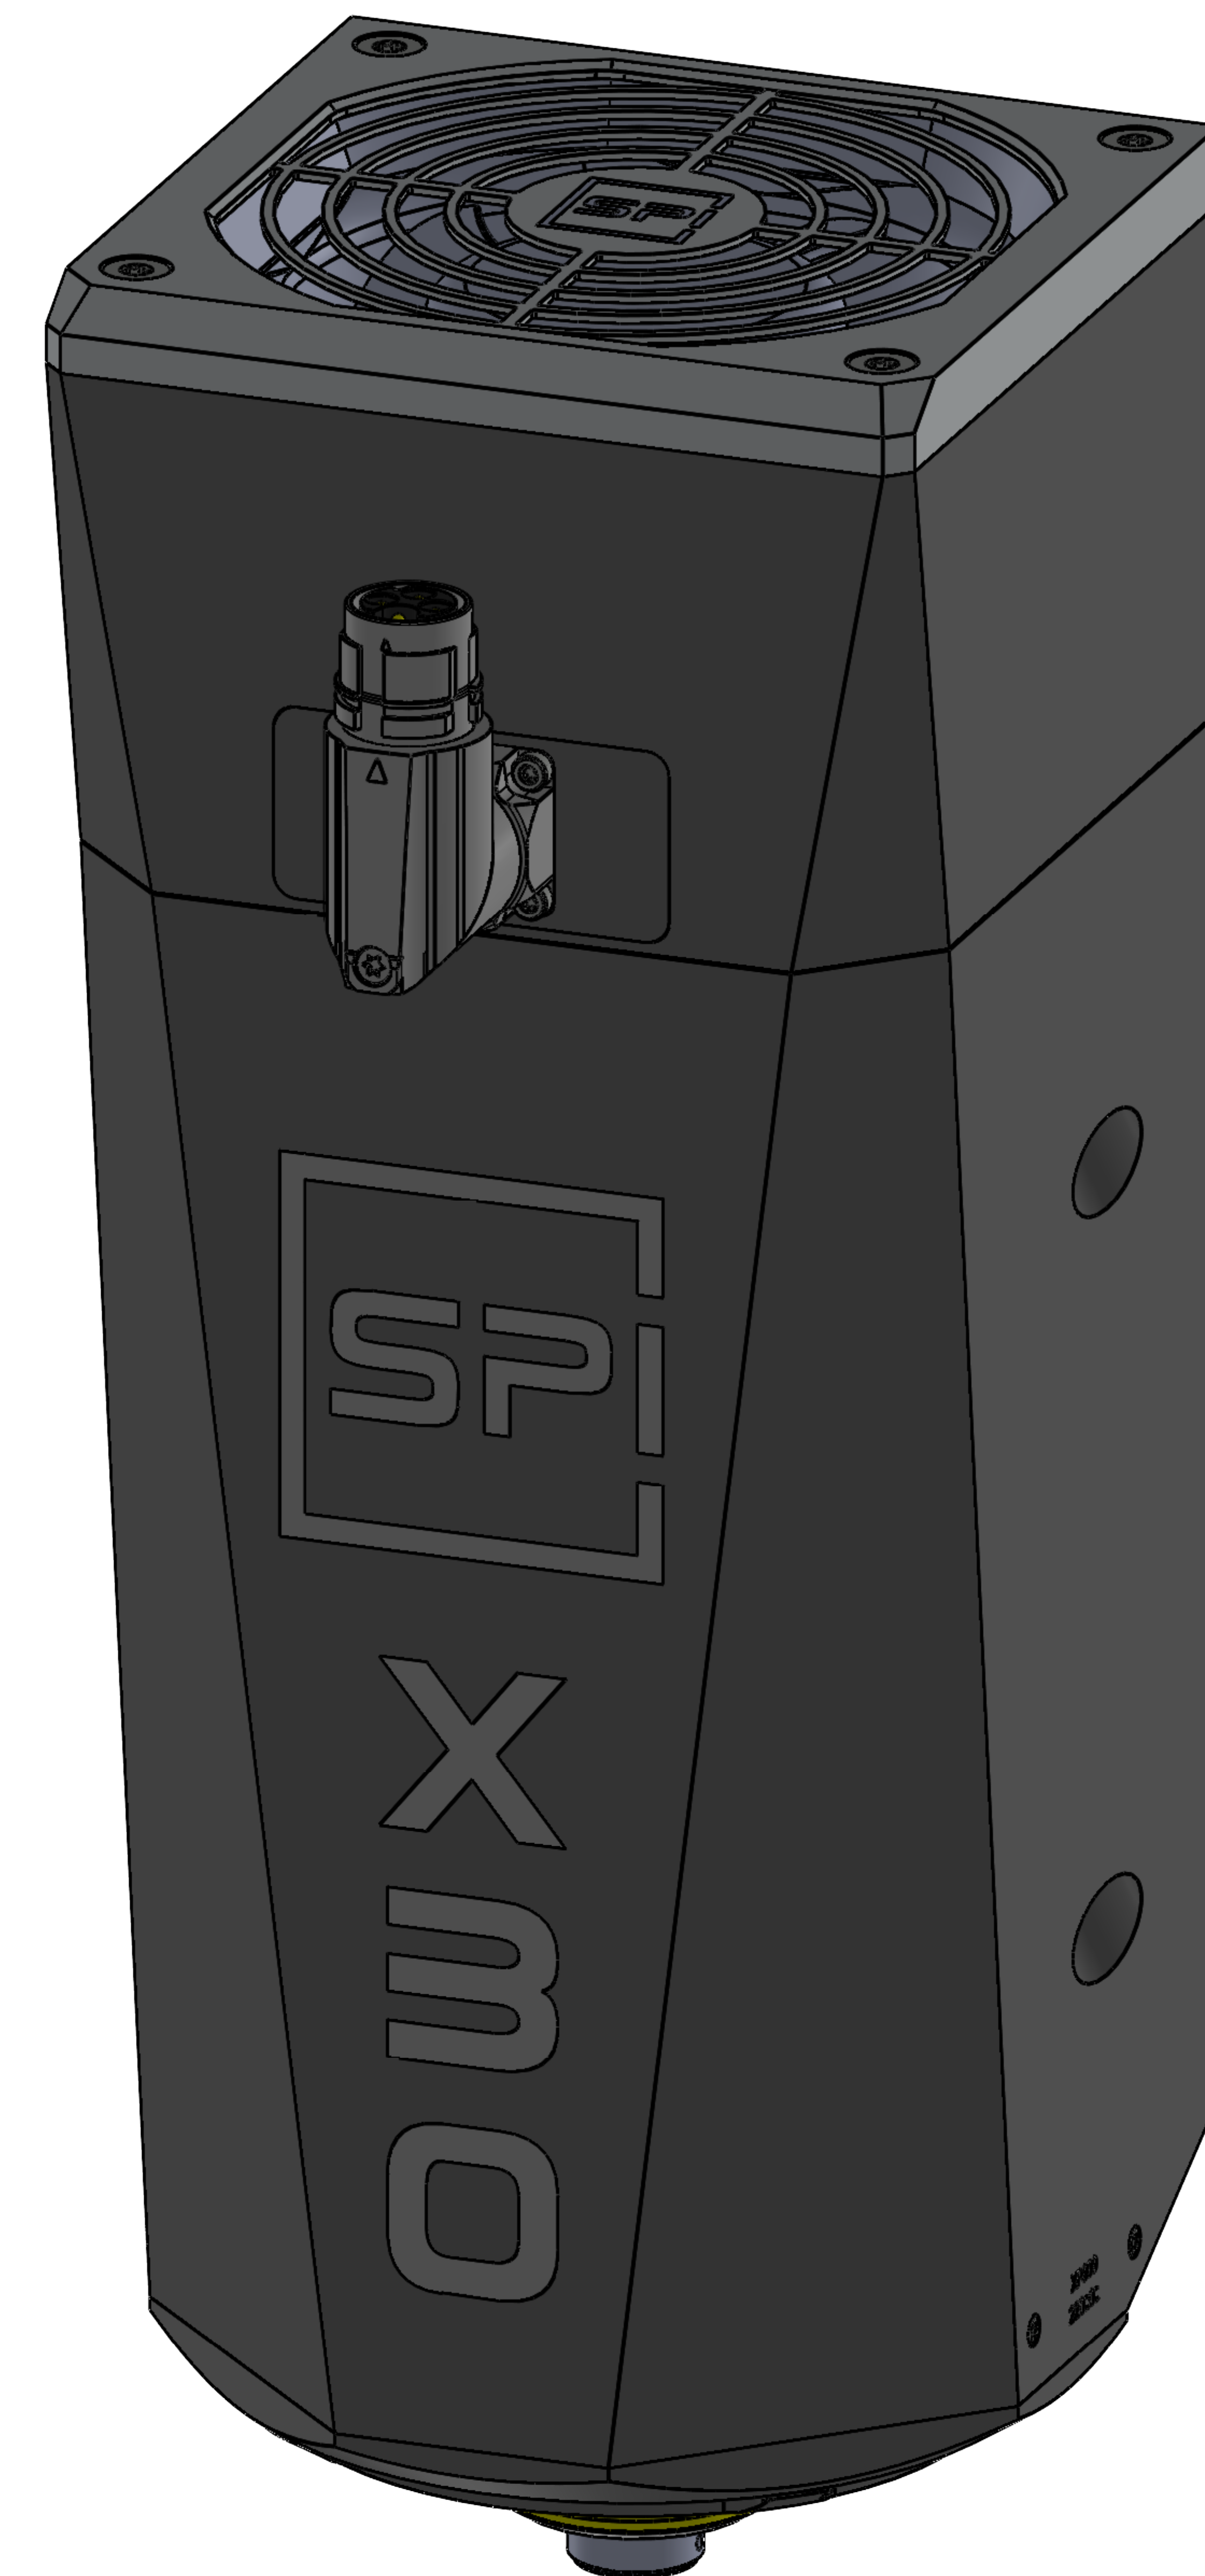

Basic configuration

Title X30-L-QTC-HSK32		Item-No. XP128	
Scale 2:1	Rev. A	Date 02.11.2023	Sheet 2

