

Title
X30-F-SK30

Item-Nr.
XP093



Scale	Rev.	Date	Sheet
2:1	A	14.04.2023	1

Technical Data - X30 - Automatic tool change

Power: 3,0 kW | 4,0 kW | 5,0 kW

Voltage: 400 V

Number of poles: 2-poles | 4-poles

Cooling method: Liquid cooling

Tool interface: SK30

Rotational speed: 25.000 - 35.000 rpm

Spindle bearings: Steel bearings | Hybrid bearings

Temperature sensor: PTC | PT100 (bearings, coil end)

Rotational speed sensor: Incremental | Inductive

Motor plug: 9-pole straight | 9-pole angled

Sensor plug: 17-pole straight | 17-pole angled

Coolant connection: 8 mm straight | 8 mm angled

Pneumatic connection: 6 mm straight | 6 mm angled


Release pressure: 6 - 8 bar

Pneumatic piston return: 3 - 4 bar

Taper blow: 3 - 4 bar

Protection class: IP54

Weight: 12,7 kg

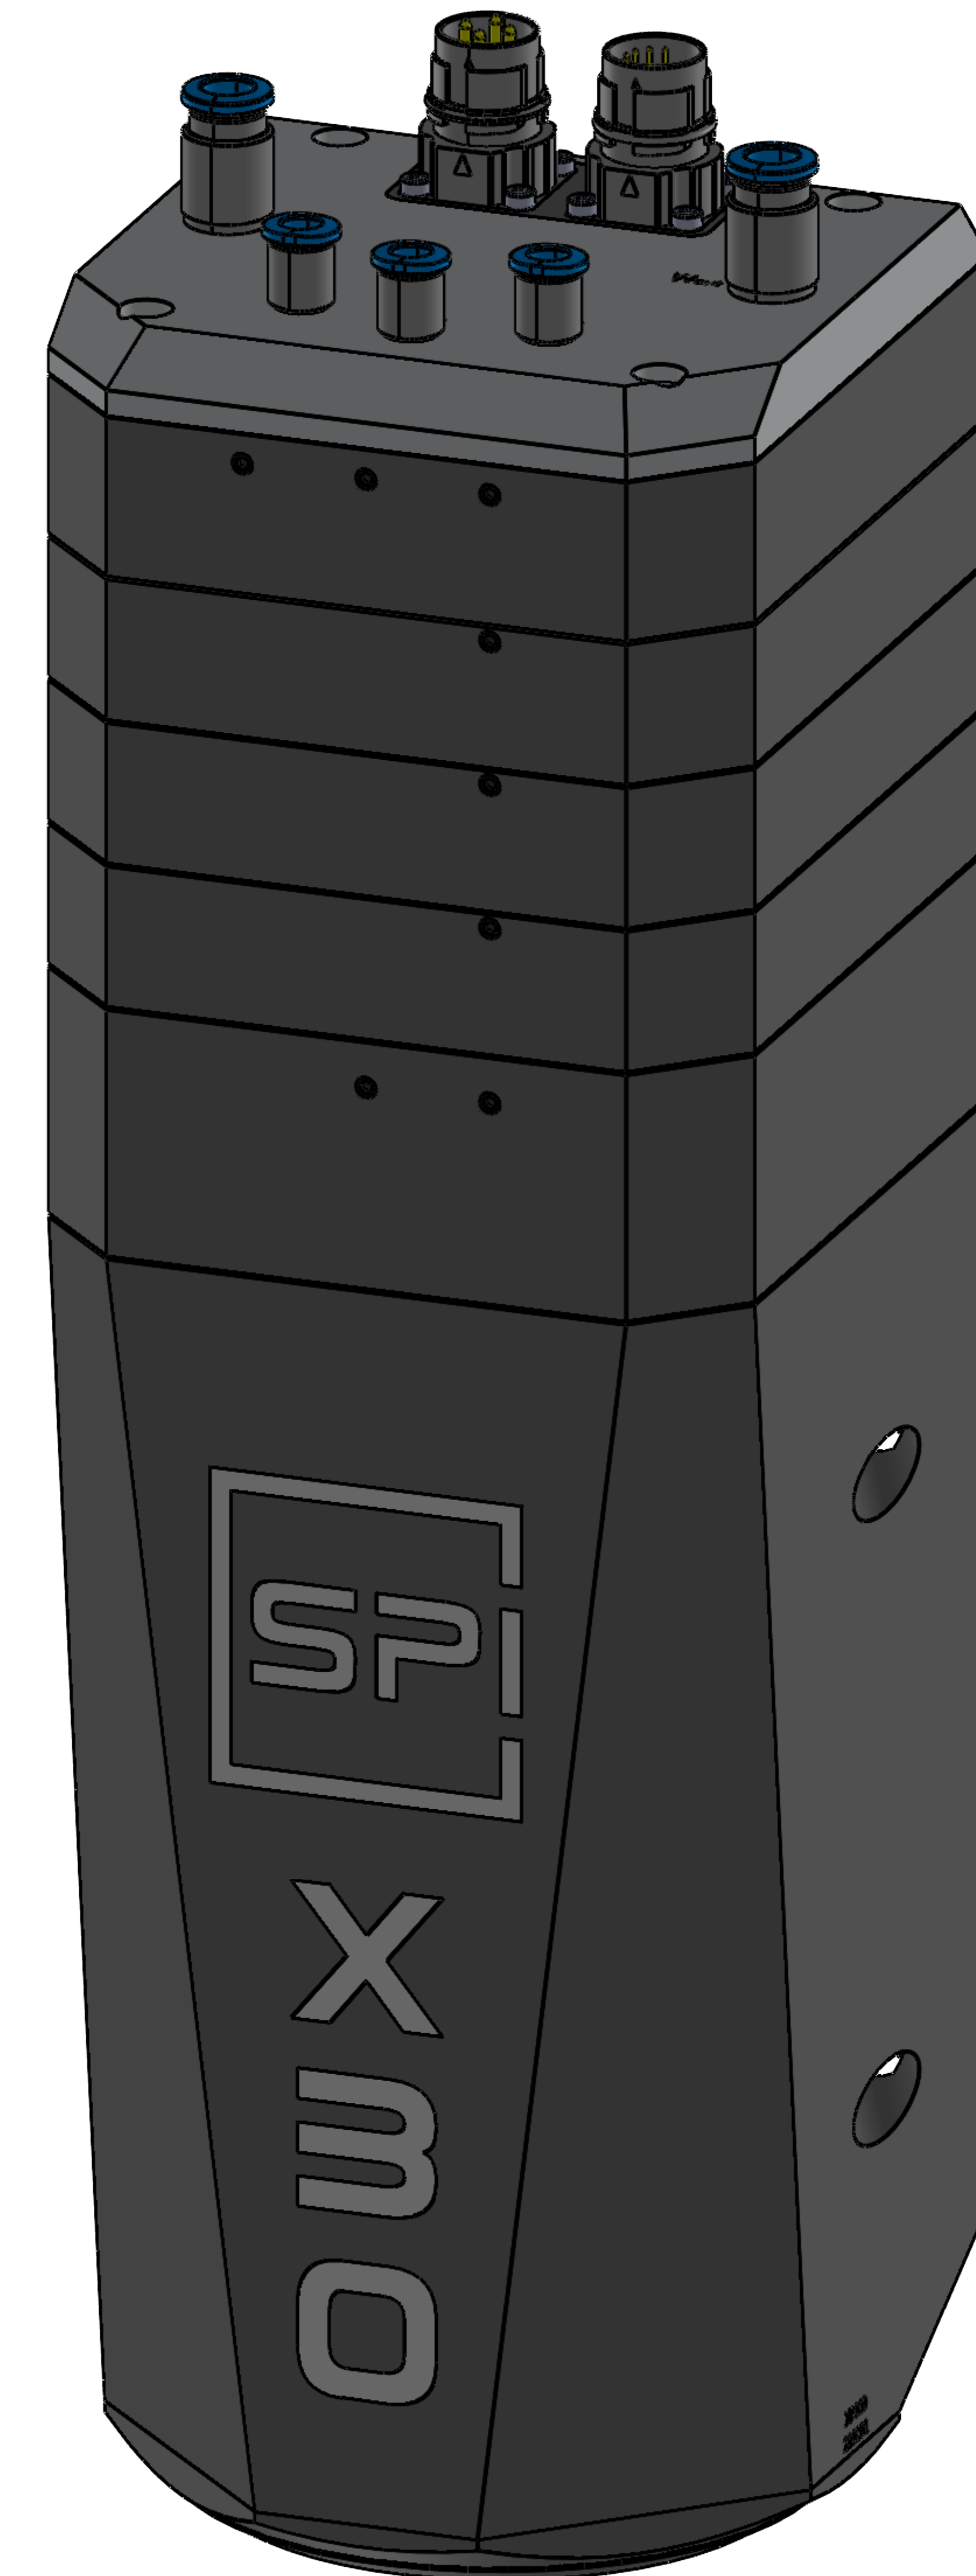

Title
X30-F-SK30

Item-Nr.
XP093



Scale	Rev.	Date	Sheet
2:1	A	14.04.2023	2